


The first open switch for open networks leveraging unique hardware-agnostic operating system

Two powerful modes of operation to suit your needs

- ➔ **Open vSwitch (OVS) Mode:** providing industry-leading OpenFlow* support & integration with CloudStack or OpenStack
- ➔ **Layer 2 / Layer 3 Mode:** enabling seamless integration into existing networks

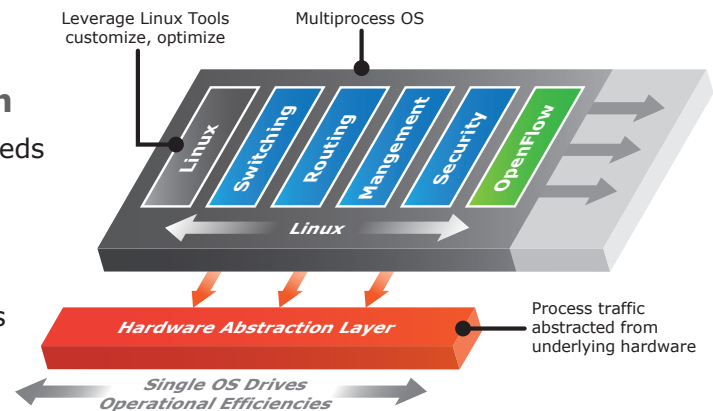

Overview

Pica8 is the first to offer hardware-independent open switches. Physical white box switch hardware run PicOS™, an open network operating system that supports standards-based Layer 2 / Layer 3 protocols with OpenFlow support.

What makes PicOS open?

- PicOS is hardware independent: the operating system is not tightly coupled to switching ASICs, CPU or memory hardware
- We expose Debian Linux, so you can use your existing tools for programming and optimizing Pica8 open switches to support your network
- PicOS has the most complete OpenFlow support, through Open vSwitch (OVS) integration

Leverage Pica8’s operating system – PicOS – with two powerful modes of operation

	Layer 2 / Layer 3 Mode	Open vSwitch (OVS) Mode
OPEN	<ul style="list-style-type: none"> ● Switching platform with Debian Linux on board and accessible ● Programmable and customize by leveraging vast high-quality Linux tools 	<ul style="list-style-type: none"> ● Industry-leading OpenFlow 1.3 support through Open vSwitch (OvS) 2.0 integration ● Leverage production-ready OVS switches for your CloudStack and OpenStack projects
FLEXIBLE	<ul style="list-style-type: none"> ● High-performance Layer 2 / Layer 3 switching platform for both IPv4 and IPv6 networks, seamlessly integrating into existing architectures ● Tune the fabric to meet your application needs, selectable store-and-forward or cut-through switching modes for ultra-low latency 	<ul style="list-style-type: none"> ● Interoperable with multiple Open Source OpenFlow controllers such as Ryu, Floodlight, NOX, and Trema ● Leverage different controllers and reference architectures
ADAPTIVE	<ul style="list-style-type: none"> ● PicOS a multiprocess OS, ensures each process has independent memory space, thread control, and interrupt handling for improved feature scaling 	<ul style="list-style-type: none"> ● Seamlessly add new protocols to PicOS, a multiprocess OS ● Investment protection as your application needs change

* Only OpenFlow features available in hardware are supported, to ensure optimum performance

PROTOCOLS AND STANDARDS SUPPORTED



Layer 2 Features

- Jumbo frames up to 9,216 bytes
- Provide non-blocking wire speed L2 switching
- 128K MAC address entries (32K for the P-3290 and P-3295)
- Flow control
 - IEEE 802.3x for full-duplex mode
 - Back-pressure flow control in half-duplex mode
- Broadcast, unicast, and multicast storm protection
- IGMP snooping, up to 1K groups
- VLAN support
 - IEEE 802.1Q VLANs
 - 4,094 VLANs
 - Port-based VLANs
- Spanning Tree
 - IEEE 802.1D STP
 - IEEE 802.1w RSTP
 - IEEE 802.1s MSTP
 - Per-VLAN Spanning Tree (PVST)
- Link aggregation
 - Up to 48 trunk groups
 - Up to 8 ports per trunk group
 - IEEE 802.3ad Link Aggregation & LACP
- Port mirroring (many-to-one)
- Port security
- LLDP
- Q-in-Q
- Multi-chassis Link Aggregation (mLAG)

Layer 3 Routing Features

- Maximum Routes (IPv4, IPv6): 12,000
- ECMP: 32
- RIPv2
- OSPFv2
- OSPF/ECMP
- BGP-4
- BGP-4/ECMP
- VLAN routing
- VRRP
- IP routing
- DHCP-relay including DHCP option-82 and ARP inspection

Layer 3 Multicast

- PIM-SM
- IGMPv1/v2

IPv6 Layer 3 Routing Features

- RIPng
- OSPFv3
- IPv6 routing

Security

- User/password protected system management
- L2/L3/L4 ACLs
- TACACS+ AAA
- SSHv1/v2
- SSLv3/TLS v1
- DoS attack protection

Quality of Service

- IEEE 802.1p-based CoS
- 8 priority queues per port
- DSCP-based CoS
- Policy-based DiffServ

Network Management

- Command line interface (CLI) via console port
- Telnet and SSH remote login
- SNMPv1/v2c
- AAA Radius support
- IPFIX (NetFlow) / sFlow

Open vSwitch (OVS)

- Based on OVS 2.0
- Compatible with OpenFlow 1.3 specification
- Web interface / GUI for OVS configuration
- Interoperable with RYU, Floodlight, Trema and NOX
- GRE, MPLS, OpenFlow (MPLS support on P-3297, P-3922 and P-3930 only)

Operational Programming Tools

- Debian 7.0 Linux distribution
- Modular PicOS: Service daemon for L2/L3 Mode and OVS Mode
- Extensible CLI with tools and APIs
- Configuration Commit / Rollback
- Auto provisioning with scripting capacity
- C/C++, Ruby, Python
- Configuration Management: Puppet, Chef, CFEngine (user-installed)

Standards Compliance

- 802.1D Bridging and Spanning Tree Protocol

- 802.1s Multiple Spanning Tree Protocol
- 802.1w Rapid Spanning Tree Protocol
- 802.1p QOS/COS
- 802.1Q VLAN Tagging
- 802.3ad Link Aggregation with LACP
- 802.3ab 1000BASE-T
- 802.3z Gigabit Ethernet
- 802.3ae 10 Gigabit Ethernet
- 802.3ba 40 Gigabit Ethernet

RFCs MIBs

- RFC 1157 SNMPv1
- RFC 1212 Concise MIB definition
- RFC 1213 MIB II
- RFC 1215 SNMP traps
- RFC 1256 ICMP router discovery
- RFC 1493 Bridge MIB
- RFC 1573 Interface Evolution MIB
- RFC 1643 Etherlike MIB
- RFC 1757 RMON1 MIB
- RFC 1901 Community based SNMPv2
- RFC 1905 Protocol Operations for SNMPv2
- RFC 1906 Transport Mappings for SNMPv2
- RFC 1907 Management Information Base for SNMPv2
- RFC 1908 Coexistence between SNMPv1 and SNMPv2
- RFC 1997 BGP Communities Attribute
- RFC 2021 RMON2 probes
- RFC 2096 IP Forwarding table MIB
- RFC 2233 The Interface Group MIB using SNMPv2
- RFC 2439 BGP Route Flap Damping
- RFC 2545 Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing
- RFC 2665 Ethernet-like Interfaces
- RFC 2796 BGP Route Reflection - An Alternative to Full Mesh IBGP
- RFC 3065 Autonomous System Confederations for BGP
- RFC 3392 Capabilities Advertisement with BGP-4
- RFC 4893 BGP Support for Four-octet AS Number Space
- Pica8 Private MIB

Pica8, Inc. Corporate Headquarters

1032 Elwell Court, Suite 105
Palo Alto, California 94303, USA
650-614-5838 | www.pica8.com

© Pica8, Inc., 2014. All rights reserved.
Produced in the United States 01/14.

Pica8 and PicOS are trademarks of Pica8, Inc.

Pica8 and PicOS trademarks are intended and authorized for use only in countries and jurisdictions in which Pica8, Inc. has obtained the rights to use, market and advertise the brand. Pica8, Inc. shall not be liable to third parties for unauthorized use of this document or unauthorized use of its trademarks. References in this publication to Pica8, Inc. products or services do not imply that Pica8, Inc. intends to make these available in all countries in which it operates. Contact Pica8, Inc. for additional information.